


P1 WIRING TABLE

PIN	COLOR	DESCRIPTION
A	BLUE	TMDS DATA 2-
B	WHITE	TMDS DATA 2+
N	BRAID (GROUND)	TMDS DATA 2/4 SHIELD
L	WHITE	TMDS DATA 1-
K	RED	TMDS DATA 1+
M	BRAID (GROUND)	TMDS DATA 1/3 SHIELD
C	YELLOW	TMDS DATA 0-
D	WHITE	TMDS DATA 0+
P	BRAID (GROUND)	TMDS DATA 0/5 SHIELD
T	BRAID (GROUND)	DDC CLOCK SHIELD
J	WHITE	TMDS CLOCK +
H	GREEN	TMDS CLOCK -
E	RED	DDC CLOCK
F	BLACK	DDC DATA
R	ORANGE	+5VDC POWER
S	GRAY	+5VDC GND RETURN
G	BROWN	HOT PLUG DETECT


P2 WIRING TABLE

PIN	COLOR	DESCRIPTION
1	BLUE	TMDS DATA 2-
2	WHITE	TMDS DATA 2+
3	BRAID (GROUND)	TMDS DATA 2/4 SHIELD
4	N/C	N/C
5	N/C	N/C
6	RED	DDC CLOCK
7	BLACK	DDC DATA
8	N/C	N/C
9	WHITE	TMDS DATA 1-
10	RED	TMDS DATA 1+
11	BRAID (GROUND)	TMDS DATA 1/3 SHIELD
12	N/C	N/C
13	N/C	N/C
14	ORANGE	+5VDC POWER
15	GRAY	+5VDC GND RETURN
16	BROWN	HOT PLUG DETECT
17	YELLOW	TMDS DATA 0-
18	WHITE	TMDS DATA 0+
19	BRAID (GROUND)	TMDS DATA 0/5 SHIELD
20	N/C	N/C
21	N/C	N/C
22	BRAID (GROUND)	DDC CLOCK SHIELD
23	WHITE	TMDS CLOCK +
24	GREEN	TMDS CLOCK -

VIEW FROM TERMINATION
SIDE OF INSERT

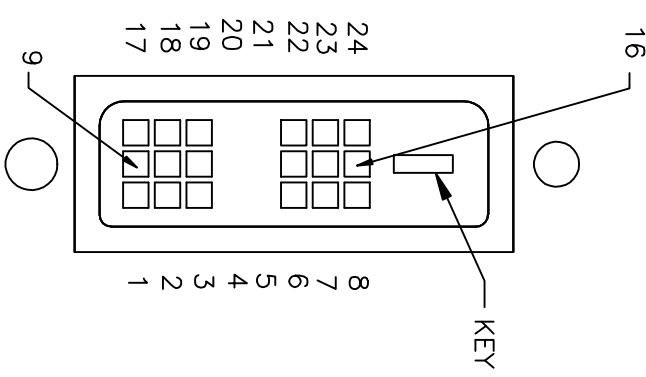

SCALE: NONE
CONTACT VIEW

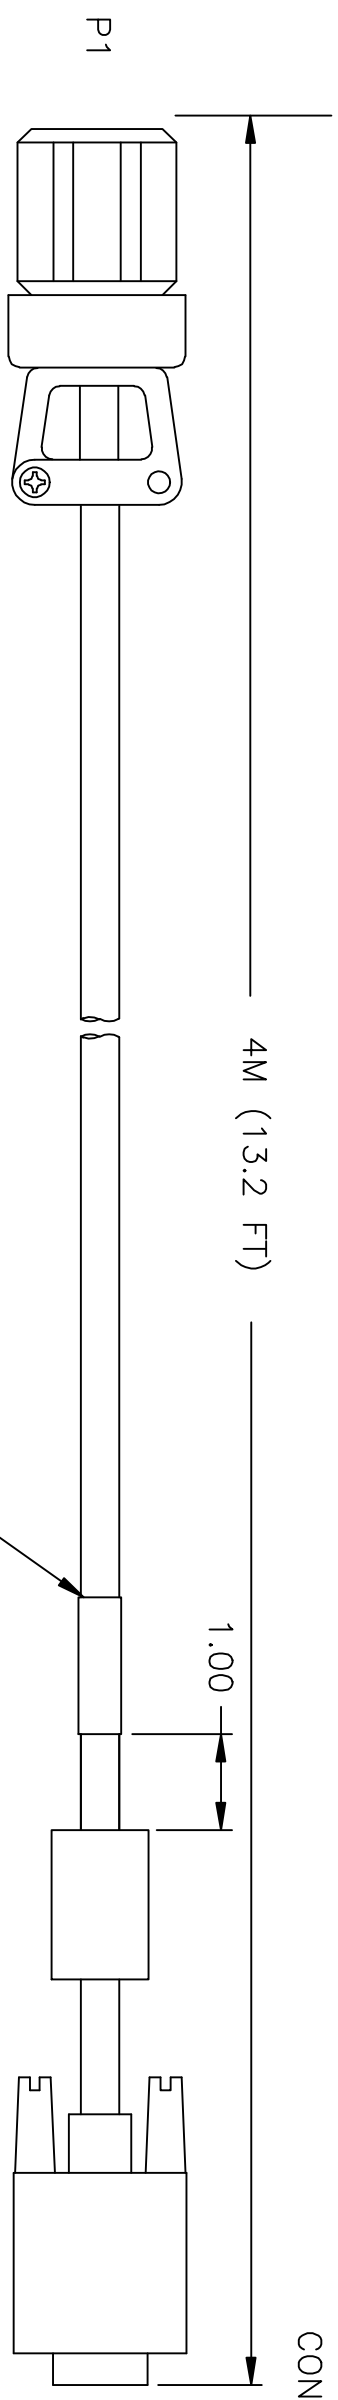

NOTES:

1. MARK CABLE PART NUMBER & LATEST REVISION.
2. CONNECTOR, 18 CONTACT, P/N D38999/26FD18PN PLUG, WITH CRIMP PIN CONTACTS P/N M39029/58-363 STRAIN RELIEF P/N M85049/38S15N
3. CABLE WITH DVI-D TO DVI-D, P/N PC CABLES #00681 OR EQUIVALENT

CHANGE HISTORY		APPROVAL
FILE INDEX	DESCRIPTION	DATE
1	RELEASE	KH 10/28/11

		DRAWN K. HOUSTON CHECKED DATE 1/02/14
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND APPLY BEFORE FINISH SURFACE ROUGHNESS TOLERANCE ON FRACTIONS DECIMALS ANGLES ± .01 ± .1 ± .005 ± .2 MATERIAL NOTED		DRAFTING ENGINEER MANUF APPROVED QA
FINISH SEE NOTES		DATE 1/02/14
APPLICATION VDMA-11K USED ON		ASSEMBLY, CABLE, DVI-D 4M LONG, EXTERNAL
SIZE B	CAGE CODE OZE75	DWG NO. 354-0508
SCALE 1 : 1	FILE NUMBER 3450508-r1	REV 1