

8

7

6

5

4


3

2

1

TABLE A

PIN NO.	COLOR	DESCRIPTION	MARK
1	RED	+V	+V
2	BLACK	RETURN	-V
3	WHITE	SHIELD	SHD



**AA**

CHANGE HISTORY

FILE INDEX	DESCRIPTION	INITIAL	APPROVAL DATE
1	PRELIMINARY RELEASE	RAS	5/5/08
2	CHANGE TEMP FROM: -40 TO: -20	RAS	5/19/08
3	ADDED NOTE 5, JACKET COLOR: BLACK	RAS	5/22/08
4	CHANGED BOTH CONNECTOR & CABLE SIZE	RAS	5/27/08
5	BEND RELIEF P/N CHANGE	EMT	6/30/08
6	ADDED -002 AND LENGTH TABLE	KH	5/22/12
7	ADDED -003 LENGTH AT 25 FT.	KH	7/19/12

TABLE A

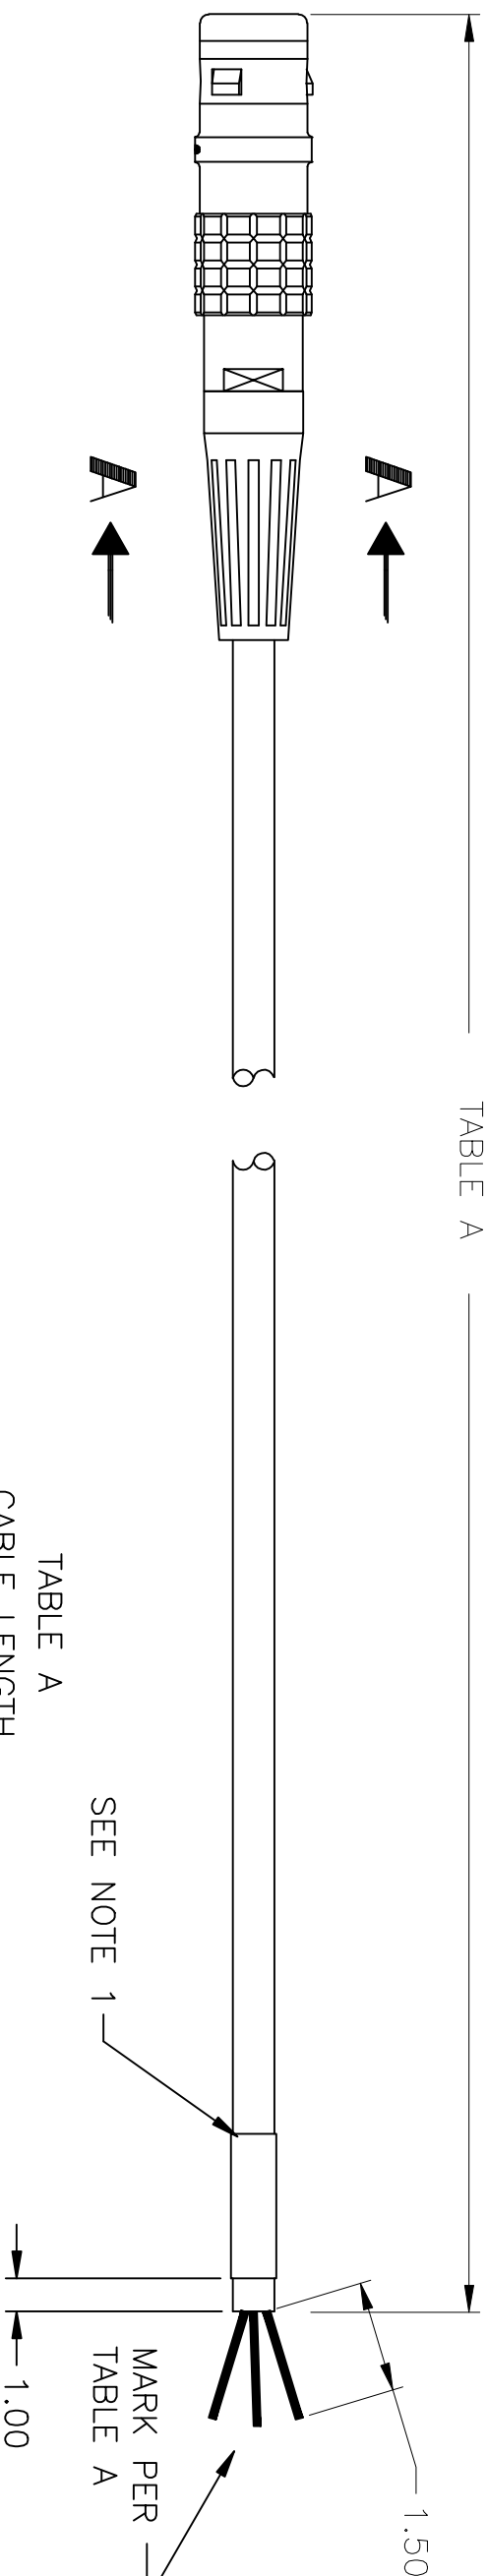


TABLE A

CABLE LENGTH

-00X	LENGTH
-001	10 FT (3M)
-002	16 FT (5M)
-003	25 FT (7.6M)

SEE NOTE 1

MARK PER TABLE A

**NOTES:**

1. MARK CABLE: 354-0122-XXX SEE TABLE Rev 7
2. CONNECTOR, 3 CONTACT, LEMO P/N FGG.1K.303.CLCC60Z PLUG (CdG) 3CTS C-COL BEND RELIEF, BLACK, [3MM], LEMO P/N GMA.1B.054.DN
3. CABLE: 3 CONDUCTOR, 18 AWG, O.D.  $\phi$ .236, -20C - +80C
4. STRIP & TIN 3 PLACES
5. CABLE: JACKET COLOR: BLACK

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND APPLY BEFORE FINISH		DRAWN ADAM SIDLE		DATE 4/14/08	
SURFACE ROUGHNESS TOLERANCE ON FRACTIONS DECIMALS ANGLES $\pm \frac{1}{64}$ $\pm .XX-01$ $\pm \frac{1}{2}$		CHECKED QA		ASSEMBLY, POWER CABLE, DC 3 COND LEMO	
MATERIAL NOTED		DRAFTING ENGINEER		SIZE B	
FINISH SEE NOTES		MANUF APPROVED		CAGE CODE OZE75	
APPLICATION		VIT04XA USED ON		DWG NO. 354-0122	
				REV 7	



8

7

6

5

4

3

2

1