


REVISION HISTORY			
REV	DESCRIPTION	APPROVED	DATE
1	INITIAL RELEASE	JAC	7/22/2011

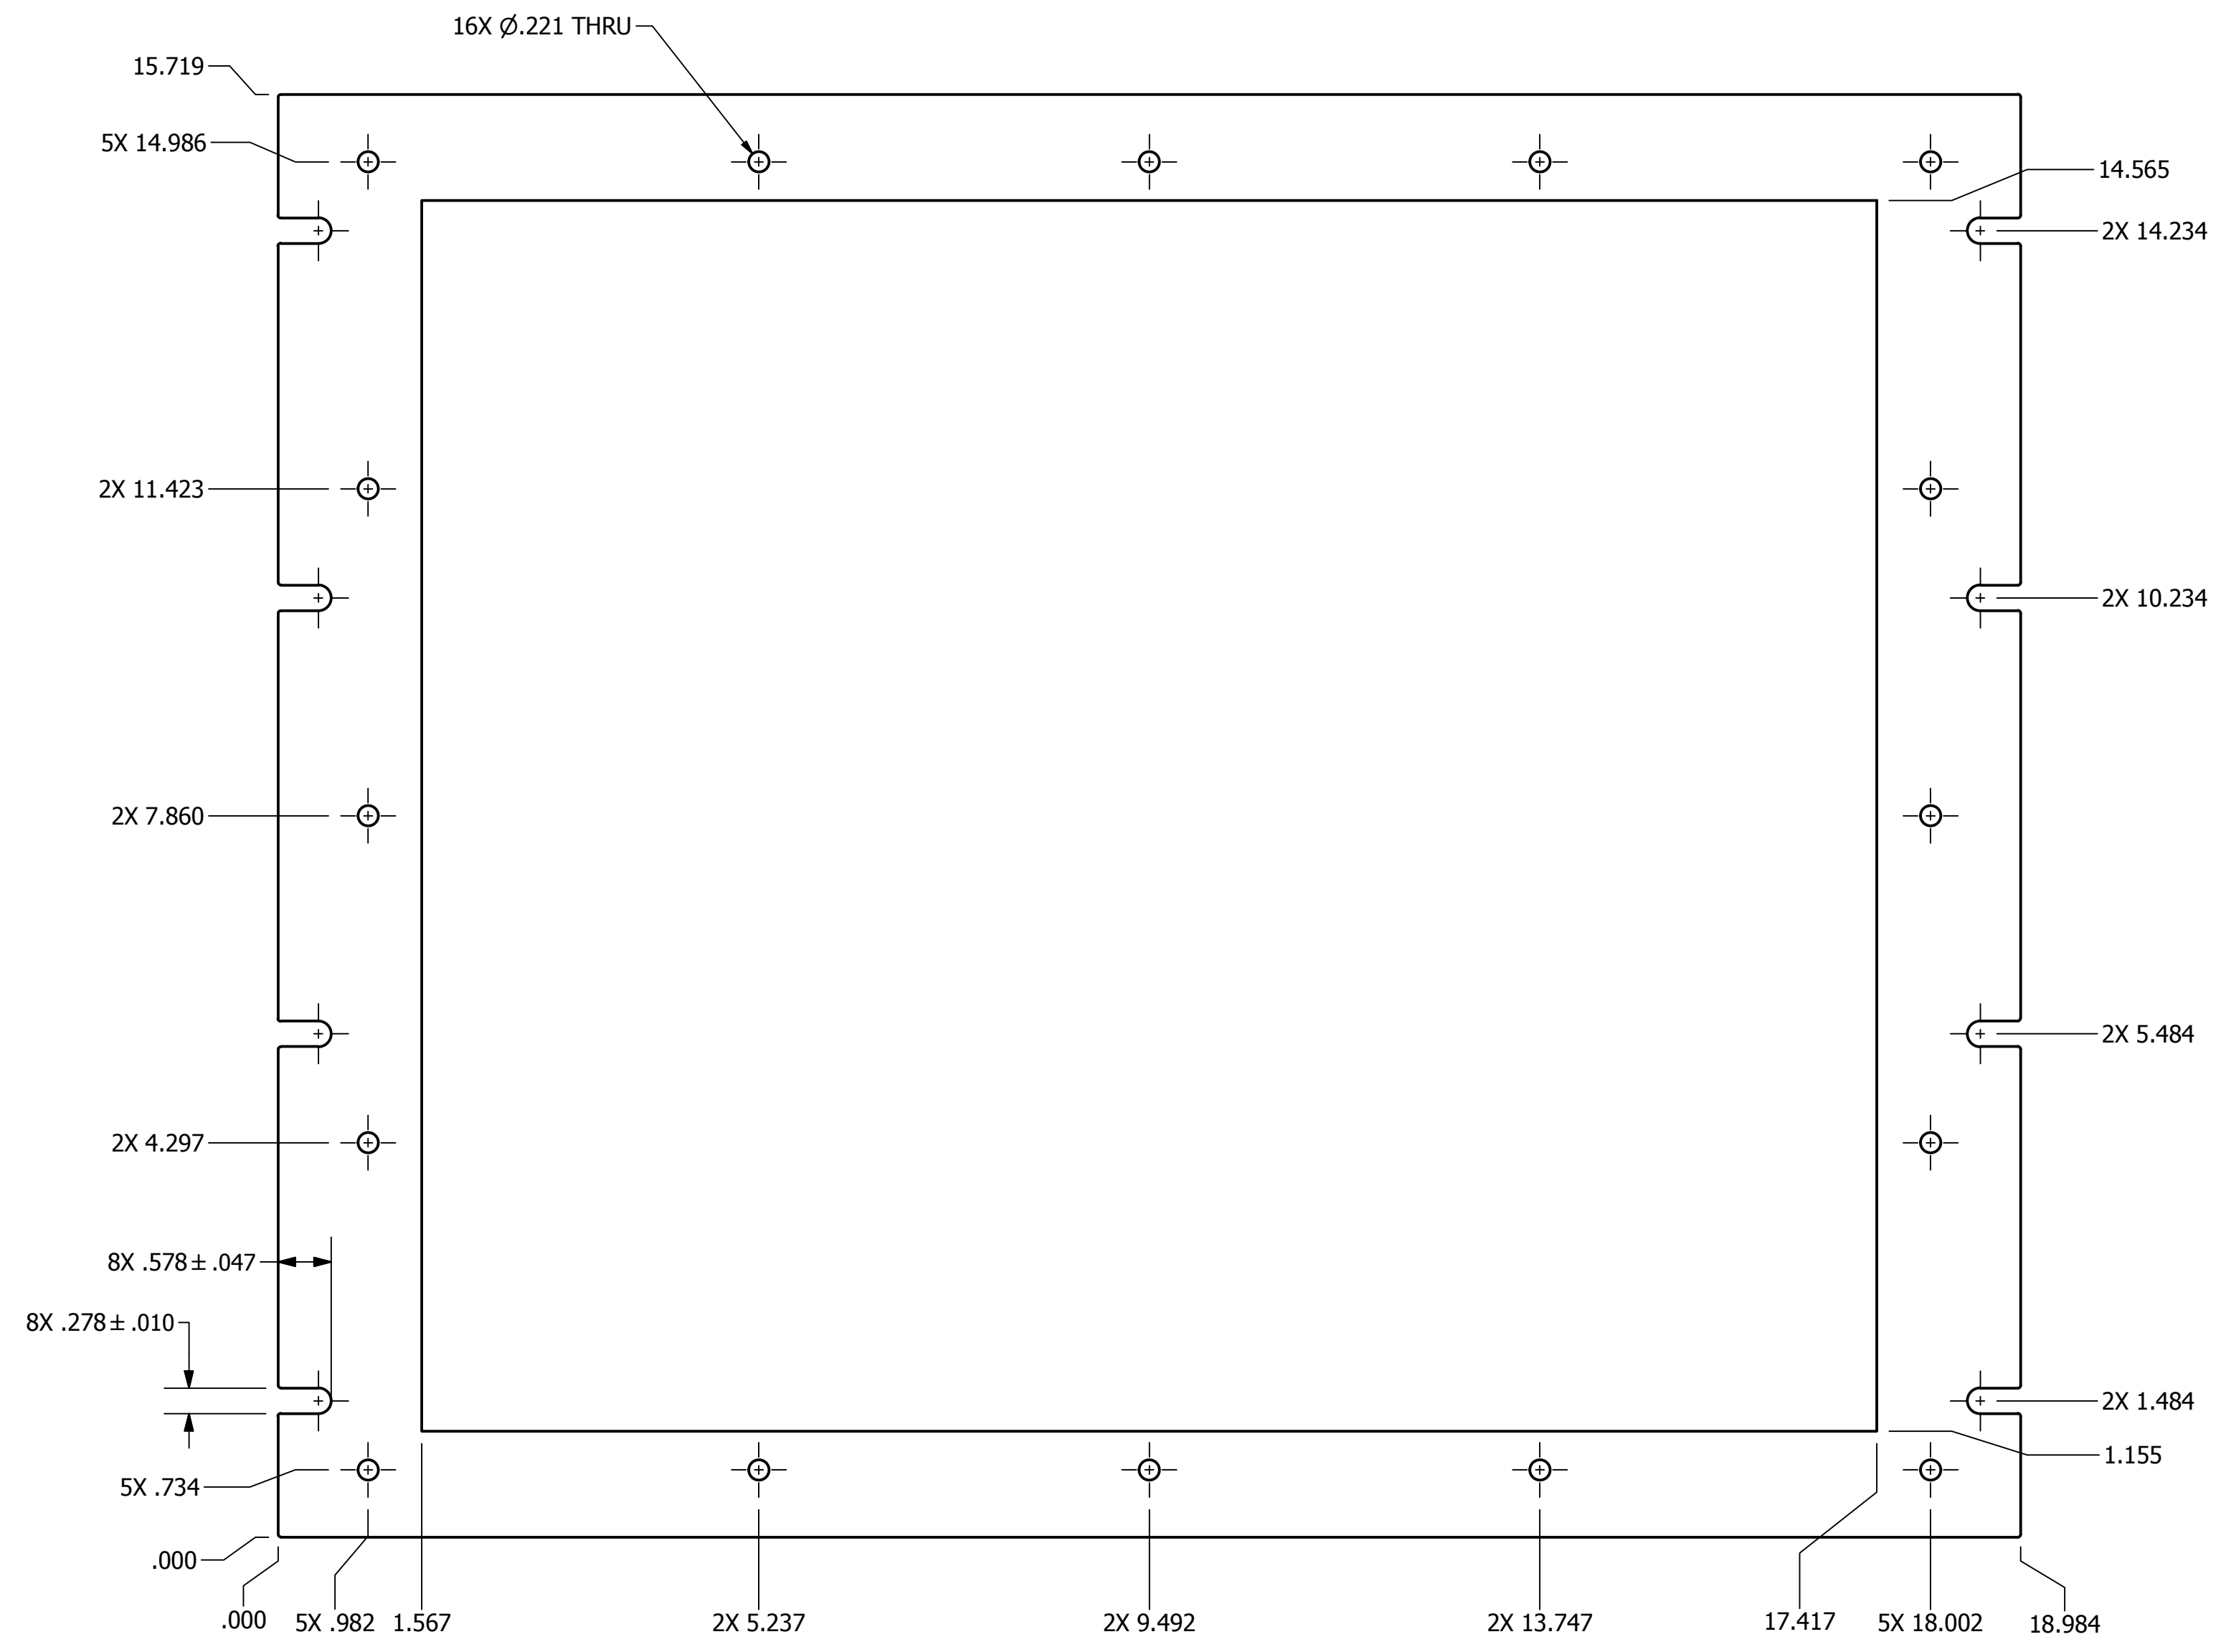

- NOTES:
- REMOVE ALL BURRS AND SHARP EDGES
 - FINISH:
 - FOR -001: A) PRE-TREAT PER POWDERCOAT SUPPLIER'S RECOMMENDATIONS
 - B) POWDERCOATING TO BE APPLIED TO ALL EXPOSED SURFACES
 - BLACK TEXTURE SEMI-GLOSS (FED STD 595 COLOR:) THE APPLIED COATING TO BE 3-4 MILS THICK.
 - FOR -002: A) CHEM FILM PER MIL-C-5541, CL 3, COLOR: YELLOW
 - B) MASK FLANGE AND INTERIOR WHERE INDICATED. SEE SHEET 2.
 - C) POWDERCOATING TO BE APPLIED TO ALL EXPOSED SURFACES
 - BLACK TEXTURE SEMI-GLOSS (FED STD 595 COLOR:) THE APPLIED COATING TO BE 3-4 MILS THICK.
 - ALL THREADS AND CLEARANCE HOLES TO BE FREE OF APPLIED FINAL COATING
 - MARK PART NUMBER AND LATEST REVISION AT APPROX LOCATION SHOWN
 - INSTRUCTIONS FOR SHIPPING: PLACE IN POLYBAG AND INTERLEAF WITH CARDBOARD

DRAWN	ACARLTON	7/22/2011				
CHECKED						
QA			ADAPTOR, RACK MOUNT, VTPC170P			
MFG						
VTPC170P	APPROVED		SIZE	TOLERANCES:	DWG NO	REV
USED ON	MATERIAL:		D	.XX = .01 .XXX = .005	EXP-0142-00-01	1
APPLICATION	ALUMINUM		FINISH:	SEE NOTES		SHEET 1 OF 1